


Yealink Dect Cordless handset provisioning

Mike Johnstone - 2024-07-11 - Yealink Devices

Yealink Dect Cordless handsets

Supports W52, W56, W70, W76

Yealink DECT handsets are compatible with our [device provisioning](#) system. However, to complete the installation you'll need to manually pair each handset with its base station. This final one minute step, is not covered by Yealink's automatic provisioning services.

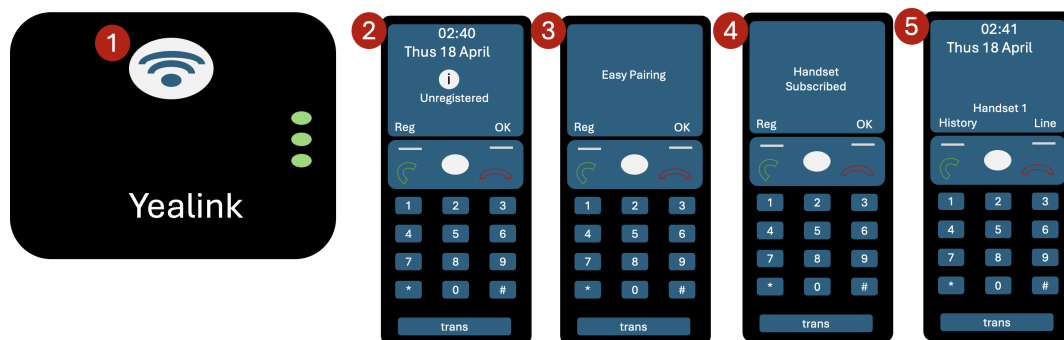

Step 1: Base Station - Press and hold **<Pager Button>**

Step 2: Handset - Press **<Reg key>**

Step 3: Handset - status > **Easy Pairing**

Step 4: Handset - status > **Handset Subscribed**

Step 5: Handset - **Handset Registered**

Factory Reset

If you are bringing a used Yealink DECT handset to 2talk we recommend first factory resetting the unit.

Press **OK** to enter the main menu.

Step 1: Select Settings>System Settings>Base Reset.

Step 2: Enter the system PIN (default: 0000), and then press the Done soft key.

Step 3: Highlight Reset to factory, and then press the OK soft key.

Step 4: The resetting process may take a few minutes. Do not power off until the base station starts up successfully.

See also: [Yealink Device Provisioning](#)